

12, 20, 26
kW

POWERPROTECT™ DX
Standby Generators



YOU.POWERED.



DX

Packed with innovation, and built from the ground up to be ready for anything, our Power Protect™ DX line of generators offer a solution for any home's power needs with the most post installation coverage. From our sleek, compact 12kW¹ to the industry's most powerful air-cooled generator at 26kW¹, this line is also backed by the industry's leading dealer service network.

FEATURES



Warranty

10-Year limited warranty of parts, labor, and travel. The industry's most comprehensive warranty over time.²



26kW Industry's Most Powerful

Worry-free backup power with the industry's most powerful air-cooled generator.



Highest Rated 20kW Natural Gas Unit in Its Class

Designed to provide the most power in their class on natural gas installations.³



12kW Compact Size

The smallest generator footprint in its class⁴ allows for a low impact installation, perfect for small properties.



Commercial-Grade Vanguard® Engine

Powerful engine built in the USA for commercial applications providing power for electronics.



Weekly Test Mode

Default weekly exercise cycle for 16 seconds, executed at a low speed to save fuel and reduce noise.



Flexible Installation & Maintenance

Approved for installation as close as 18" to a building⁵ with easy toolless panel removal for serviceability and maintenance (20kW & 26kW).



Corrosion Resistant Enclosure & Base

Automotive-grade galvanized steel base and aluminum enclosure to resist rust, and powder-coated paint for years of protection against chips and abrasions.



Assembled and Engineered in USA

Briggs & Stratton generators are designed and assembled in the USA.⁶



Power Management System (optional)

Customizable to your home's power needs, Symphony® II and Amplify™ Power Management systems offer prioritized whole house power with a more affordable standby generator.

12, 20, 26

kW

POWERPROTECT™ DX Standby Generators

| Generator Set Rating | | | |
|--|-------------|-------------|-------------|
| Model Name | PPDX12 | PPDX20 | PPDX26 |
| Model Number | 040669 | 040657 | 040664 |
| Running Watts (Liquid Propane/Natural Gas) kW ¹ | 12.0 / 10.8 | 20 / 20 | 26 / 24 |
| Running Amperage (Liquid Propane/Natural Gas) Amps | 50 / 45 | 83.3 / 83.3 | 108.3 / 100 |
| Voltage | 120 / 240 | 120/240 | 120 / 240 |
| Circuit Breaker Amps | 60 | 100 | 125 |

| Engine | |
|-----------------------------------|-----------|
| Manufacturer | Vanguard® |
| Frequency Regulation Steady State | +/-1.0% |

| Sound Rating ⁷ | PPDX12 | PPDX20 | PPDX26 |
|-------------------------------------|--------|--------|--------|
| Low Idle Mode Sound | 64 dBA | 65 dBA | 63 dBA |
| Normal Operating Sound ⁷ | 70 dBA | 68 dBA | 65 dBA |


| Fuel Consumption ⁸ | PPDX12 | PPDX20 | PPDX26 |
|-------------------------------|-----------------------------|-----------------------------|-----------------------------|
| No Load (BTU/hr) | NG - 66,000 / LP - 57,000 | NG - 99,000 / LP - 100,000 | NG - 122,000 / LP - 123,000 |
| Half Load (BTU/hr) | NG - 117,000 / LP - 155,000 | NG - 187,000 / LP - 208,000 | NG - 206,000 / LP - 235,000 |
| Full Load (BTU/hr) | NG - 172,000 / LP - 209,000 | NG - 260,000 / LP - 338,000 | NG - 323,000 / LP - 427,000 |

| Available Accessories | PPDX12 | PPDX20 | PPDX26 |
|-------------------------------|----------|--------|--------|
| Oil Warmer | Standard | | 6840 |
| Battery Warmer | 6578 | | N/A |
| Maintenance Kit | 6872 | | 6872 |
| Fuel Regulator Warmer | | 6845 | |
| Surge Protector | | 6631 | |
| Amplify Gateway | | 6520 | |
| UPS | | 6581 | |
| InfoHub™ Universal - Cellular | | 6574 | |
| Gateway Range Extender | | 6839 | |


| Product Dimensions | PPDX12 | PPDX20 | PPDX26 |
|-------------------------------|---------------------------------------|--|--|
| Overall Dimensions (in / mm) | 28.0 x 24.5 x 37.2 / 712 x 622 x 944 | 46.5 x 26.8 x 28.4 / 1181 x 681 x 721 | 46.5 x 26.8 x 28.4 / 1181 x 681 x 721 |
| Packaged Dimensions (in / mm) | 39.0 x 33.5 x 45.0 / 991 x 851 x 1143 | 48.8 x 30.5 x 50.5 / 1240 x 775 x 1283 | 48.8 x 30.5 x 50.5 / 1240 x 775 x 1283 |
| Assembled Weight (lbs / kg) | 361 / 164 | 435 / 200 | 540 / 245 |
| Packaged Weight (lbs / kg) | 423 / 192 | 520 / 240 | 625 / 285 |



12kW (PPDX12)

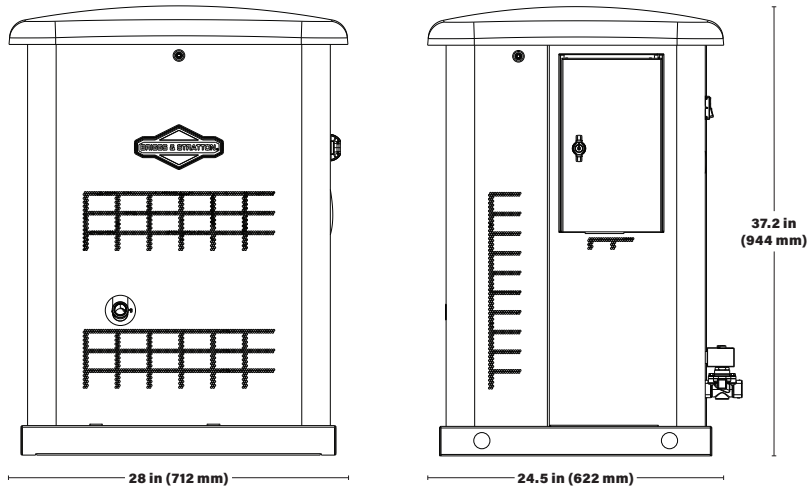

20kW & 26kW (PPDX20, PPDX26)

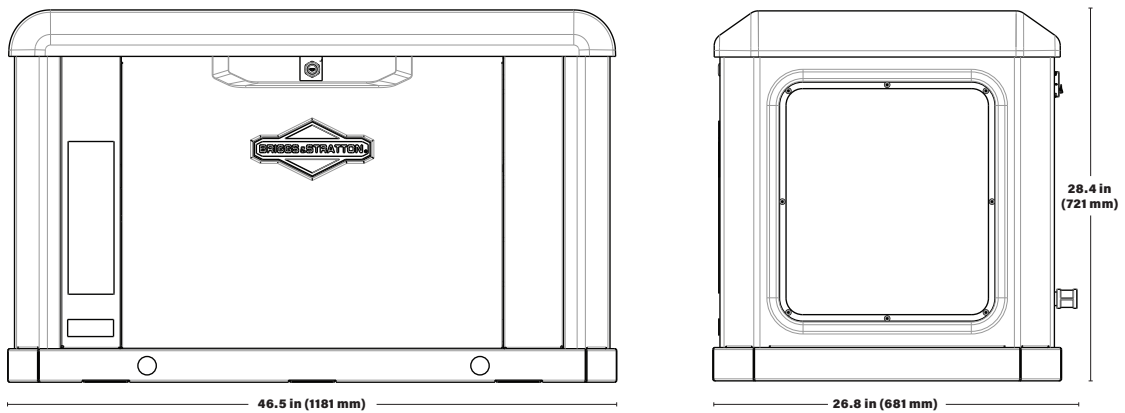

12,20,26

kW

POWERPROTECT™ DX
Standby Generators



Most comprehensive warranty in the industry over time.³

You're covered for 10 years on parts, labor, and travel through the entire warranty period. This extended warranty is offered to every model in the Power Protect™ DX lineup.

| Air-Cooled DX Warranty Comparison | Mileage | Labor | Parts | Major Components |
|---|-----------------|-----------------|-----------------|------------------|
| Briggs & Stratton – 10 years | 10 years | 10 years | 10 years | 10 years |
| Generac – 5 years | 2 years | 2 years | 3 years | 5 years |
| Kohler – 5 years | N/A | 5 years | 5 years | 5 years |
| Cummins – 5 years | N/A | N/A | 5 years | 5 years |

¹ This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motor and generators).

² See operator's manual or BRIGGSandSTRATTON.com for complete warranty details.

³ On natural gas in its named class.

⁴ 30% smaller footprint than competitors.

⁵ The installation manual contains specific instructions related to generator placement in addition to NFPA 37, including the requirement that carbon monoxide detectors be installed and maintained in your home or business.

⁶ Of global and U.S. parts.

⁷ Per ISO 3744. Sound level measurement at other locations around generator may differ depending on installation, based on lowest microphone at 7m. Normal operation based on average household usage.

⁸ Fuel consumption rates are estimated based on normal operating conditions. Generator operation may be greatly affected by elevation and the cycling operation of multiple electrical appliances — fuel flow rates may vary depending on these factors.

Briggs & Stratton has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice.

This standby generator is not for Prime Power applications.

Published July 2021. Please visit BRIGGSandSTRATTON.com for the latest information.

BS1300 - 7/21

BRIGGS & STRATTON
POST OFFICE BOX 702
MILWAUKEE, WI 53201 USA

Copyright © 2021 Briggs & Stratton. All rights reserved.